



SL Series-Slurry Pumps

MIGHTY INDUSTRIAL STRENGTH PUMPS

- Stainless Steel Clog-Free Vortex Impeller •
- Viton Elastomers • Silicon Carbide Mechanical Seal •

Features

All models come with stainless steel impellers, shaft, and fasteners; control box and 50 ft. of explosion-proof cord to 5 cond. cable on winding thermal protection with magnetic contactor in head of pump. Model P-50CSE is approved in an all 316 SS. version. All models can be supplied in non-explosion proof versions.


Performance

Range in Flows from: 20-350 US gpm


Range in Head from: 0-110 feet

Solids Handling: 2" diameter


Voltage: 230/460/525

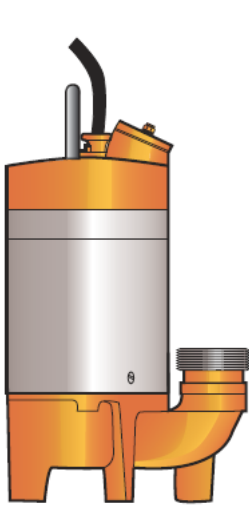






SL-500 (P30CS)

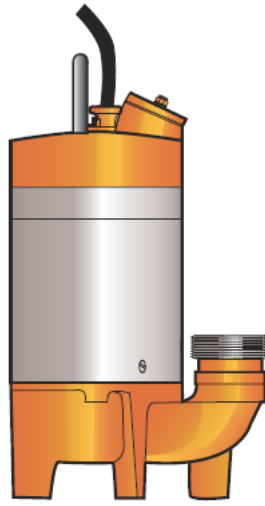

SL-750 (P40CS)

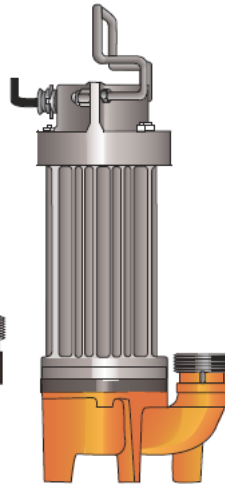

SL-1000 (P50CS)

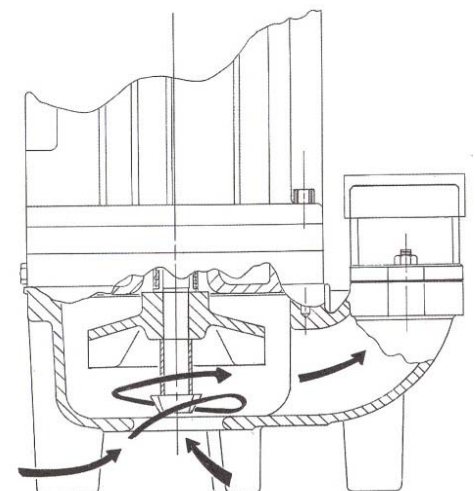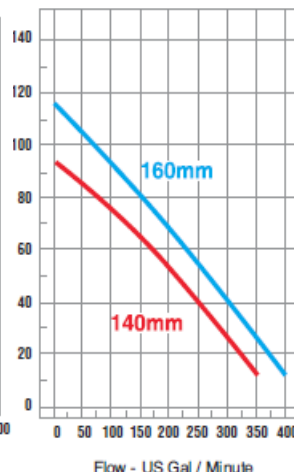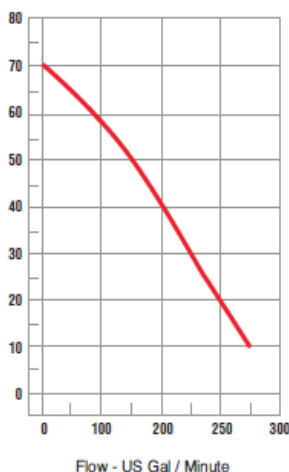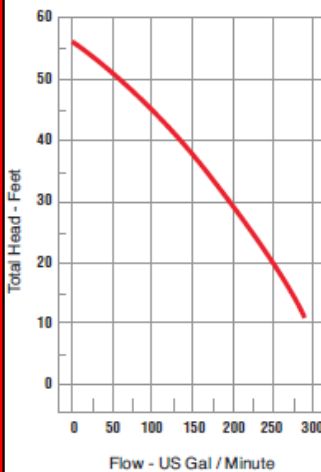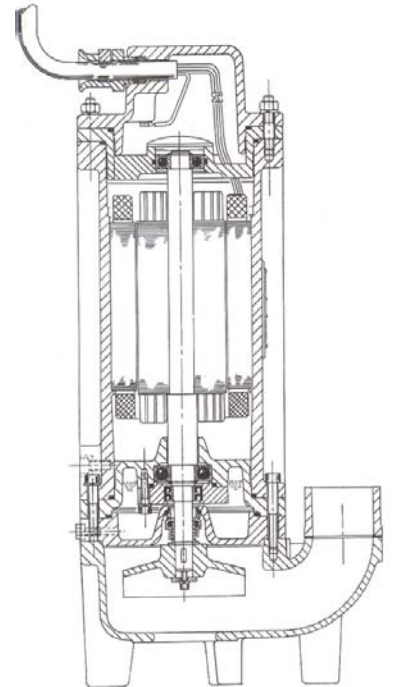

SL-1000 (P50CSD) with Dredging Auger

SL-1000 Variations

The SL-1000 is available with multiple features

SL-1000 (P50CS): Standard

SL-1000 (P50CSE): Explosion Proof, MSHA

SL-1000 (P50CSS): 316 Stainless Steel

SL-1000 (P50CSD): Internal Dredging Auger/Agitator

Phone: 1-877-898-3494

Fax: 1-866-424-0953

Email: sales@mightypumps.com

www.mightypumps.com